

UNFC IP Core

Key Features

- ↪ ONFI 5.0 Compliant
- ↪ SLC / MLC / TLC / QLC
- ↪ SDR modes 0 to 5
- ↪ NVDDR modes 0 to 5
- ↪ NVDDR-2 modes 0 to 8
- ↪ NVDDR-3 modes 0 to 10
- ↪ NV-LPDDR4 mode 0 to 15
- ↪ AXI or Avalon interface
(optionnal internal DMA)
- ↪ Up to ECC 84-errors / 1k block
- ↪ Configurable Data block size

Benefits

- ↪ Scalable architecture for
 - ⇒ Cost optimization
 - ⇒ High performance
- ↪ Reduced Time-To-Market by using validated IP

Evaluation

- ↪ Full features
- ↪ Simulation testbench


Deliverables

- ↪ Verilog RTL source code
- ↪ Synthesis scripts
- ↪ Simulation testbench
- ↪ Technical documentation
- ↪ Technical support

Overview

IP-Maker's Universal NAND Flash Controller (UNFC) IP core is designed specifically to enable commodity Flash memory to be effectively used in enterprise storage applications requiring high reliability and large interconnect bandwidth. Using the pre-validated UNFC IP allows greatly reduced time-to-market for storage OEMs desiring higher IOPS benefitting from lower cost SLC, MLC, TLC & QLC NandFlash memory.

The IP-Maker UNFC is full-featured, easy to use in FPGA and SoC designs. For ease of integration with the system interfaces, three native backends (AXI, Avalon and RAM) are provided. However, the connection modules can be customized. The IP core allows page size configuration, spare size per channel. The channel based address is dynamically set.

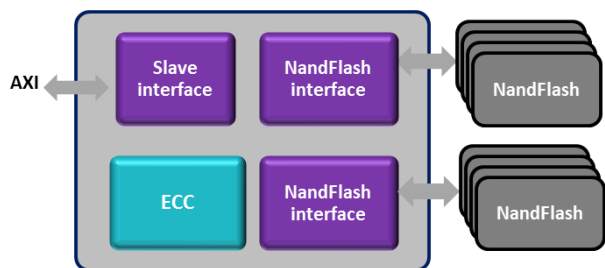

NandFlash interface

The NAND flash interface handles all the hardware compliant process (command, address and data sequences). It is ONFI 5.x compliant. Data and Metadata can be protected by the ECC by using configurable data block size (e.g. 1024 bytes + x metadata bytes.)



BCH Encoder/Decoder IP Core

Key Features


- ↪ ECC for NandFlash Storage
 - ↪ Up to 84 error-bits/block
 - ↪ Configurable block size
- ↪ Fully Configurable
 - ↪ Latency
 - ↪ Datapath
 - ↪ Error number
 - ↪ Packet size

Benefits

- ↪ Full hardware implementation for maximum performance, encoding, error detection and correction
- ↪ Balanced performance/gatecount
- ↪ All Galois fields covered
- ↪ Validated IP reduces Time-To-Market

Overview

Nand Flash write cycles are limited. An ECC detects and corrects failed operations, increasing the lifetime of the Nand Flash memory. For Nand Flash-based data storage, using an ECC is mandatory to ensuring data validity. IP-Maker's powerful ECC is based on the BCH algorithm. The IP-Maker BCH Encoder/Decoder is full-featured with ease-of-use in FPGA and SoC designs.

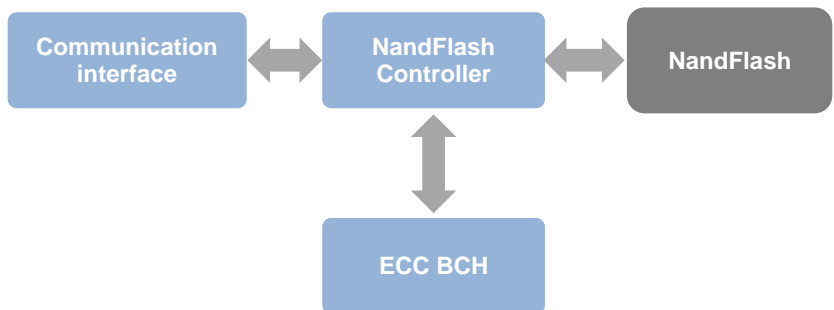

ECC BCH in a storage system

Evaluation

- ↪ Full features
- ↪ Simulation testbench
- ↪ Evaluation package for FPGA

Deliverables

- ↪ Verilog RTL source code
- ↪ Synthesis scripts
- ↪ Technical documentation
- ↪ Technical support

The IP-Maker BCH Encoder/Decoder is fully configurable, allowing to it reach the best latency or the smallest footprint. Customizable parameters include: Chien Search algorithm, Galois Field, and data path. The IP-Maker BCH Encoder/Decoder IP Core is delivered in Verilog RTL that can be implemented in an ASIC or FPGA. It is fully tested with test bench models and hardware tested with FPGAs. The package includes Verilog RTL code, technical documentation, and a complete test environment.